


CoroThread® 266 wisselplaat voor draadsnijden

V-profiel 55° niet afgetopte draad

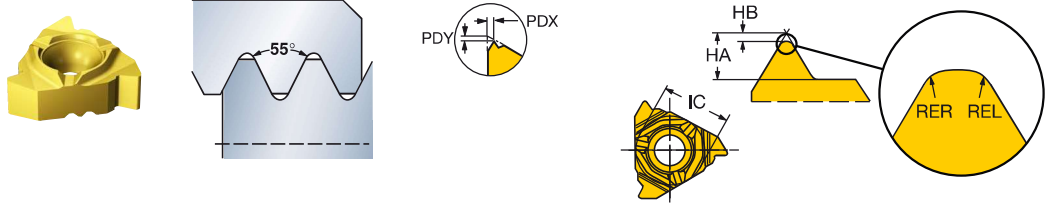

C **Uitwendige rechtse draad**

TPIN	TPIX	NT	Bestelcode	Afmetingen, mm												
				P		M		K		N		S		H		
				1020	1125	1020	1125	1020	1125	1020	1125	1020	1125	1020	1125	
16	14.0	28.0	1	266RG-16VW01A001M	★	☆	★	☆	★	☆	★	☆	★	☆	★	☆
	14.0	28.0	1	266RG-16VW01C001M	★		★		★		★		★		★	
	14.0	28.0	1	266RG-16VW01F001E		★		★		★		★		★		★
	8.0	14.0	1	266RG-16VW01A002M	★	☆	★	☆	★	☆	★	☆	★	☆	★	☆
	8.0	14.0	1	266RG-16VW01C002M	★		★		★		★		★		★	
	8.0	14.0	1	266RG-16VW01F002E		★		★		★		★		★		★
22	4.0	7.0	1	266RG-22VW01A001M	☆	★	☆	★	☆	★	☆	★	☆	★	☆	★
	4.0	7.0	1	266RG-22VW01F001E	★		★		★		★		★		★	

D **Uitwendige linkse draad**

TPIN	TPIX	NT	Bestelcode	Afmetingen, mm												
				P		M		K		N		S		H		
				1020	1125	1020	1125	1020	1125	1020	1125	1020	1125	1020	1125	
16	14.0	28.0	1	266LG-16VW01A001M	★		★		★		★		★		★	
	8.0	14.0	1	266LG-16VW01A002M	★		★		★		★		★		★	
22	4.0	7.0	1	266LG-22VW01A001M	★		★		★		★		★		★	

E **Inwendige rechtse draad**

TPIN	TPIX	NT	Bestelcode	Afmetingen, mm												
				P		M		K		N		S		H		
				1020	1125	1020	1125	1020	1125	1020	1125	1020	1125	1020	1125	
16	14.0	28.0	1	266RL-16VW01A001M		★		★		★		★		★		★
	14.0	28.0	1	266RL-16VW01C001M			★		★		★		★		★	
	14.0	28.0	1	266RL-16VW01F001E			★		★		★		★		★	
	8.0	14.0	1	266RL-16VW01A002M		★		★		★		★		★		★
	8.0	14.0	1	266RL-16VW01C002M			★		★		★		★		★	
	8.0	14.0	1	266RL-16VW01F002E			★		★		★		★		★	
22	4.0	7.0	1	266RL-22VW01A001M	☆	★	☆	★	☆	★	☆	★	☆	★	☆	★
	4.0	7.0	1	266RL-22VW01F001E	★		★		★		★		★		★	

F **Inwendige linkse draad**

TPIN	TPIX	NT	Bestelcode	Afmetingen, mm												
				P		M		K		N		S		H		
				1020	1125	1020	1125	1020	1125	1020	1125	1020	1125	1020	1125	
16	14.0	28.0	1	266LL-16VW01A001M		★		★		★		★		★		★
	8.0	14.0	1	266LL-16VW01A002M		★		★		★		★		★		★
22	4.0	7.0	1	266LL-22VW01A001M	★		★		★		★		★		★	

R = Rechts, L = Links

