


CoroThread® 266 wisselplaat voor draadsnijden

STUB-ACME 29° Aangeschuide draadtop

B

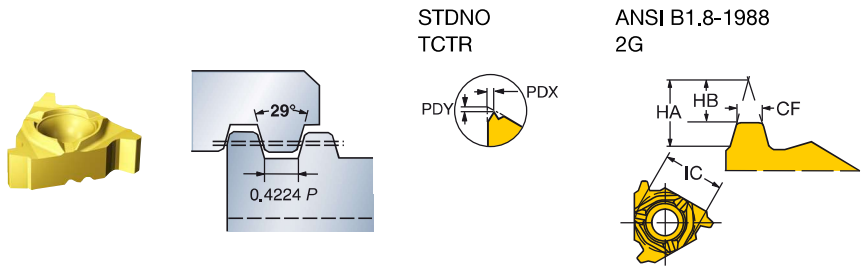

STDNO
TCTR

ANSI B1.8-1988
2G

Uitwendige rechtse draad

C

TPI	NT	Bestelcode	P		M		K		N		S		H		Afmetingen, mm					
			1020	1135	1020	1135	1020	1135	1020	1135	1020	1135	1020	1135	CF	HA	HB	PDX	PDY	
16	16.0	1	266RG-16SA01F160E	*	*	*	*	*	*	*	*	*	*	*	*	0.6	1.86	1.21	1.50	1.23
14.0	1	266RG-16SA01F140E	*	*	*	*	*	*	*	*	*	*	*	*	*	0.7	2.12	1.40	1.85	1.30
12.0	1	266RG-16SA01F120E	*	*	*	*	*	*	*	*	*	*	*	*	*	0.9	2.47	1.65	1.10	1.32
10.0	1	266RG-16SA01F100E	*	*	*	*	*	*	*	*	*	*	*	*	*	1.0	2.95	1.87	1.20	1.32
8.0	1	266RG-16SA01F080E	*	*	*	*	*	*	*	*	*	*	*	*	*	1.2	3.67	2.39	1.50	1.53
22	6.0	1	266RG-22SA01F060E	*	*	*	*	*	*	*	*	*	*	*	*	1.7	4.86	3.27	1.80	1.67
5.0	1	266RG-22SA01F050E	*	*	*	*	*	*	*	*	*	*	*	*	*	2.1	5.83	3.98	2.00	1.67
4.0	1	266RG-22SA01F040E	*	*	*	*	*	*	*	*	*	*	*	*	*	2.6	7.27	5.05	2.40	1.67
27	3.0	1	266RG-27SA01F030E	*	*	*	*	*	*	*	*	*	*	*	*	3.5	9.66	6.81	3.10	1.72

D

Uitwendige linkse draad

TPI	NT	Bestelcode	P		M		K		N		S		H		Afmetingen, mm					
			1020	1135	1020	1135	1020	1135	1020	1135	1020	1135	1020	1135	CF	HA	HB	PDX	PDY	
16	16.0	1	266LG-16SA01F160E	*	*	*	*	*	*	*	*	*	*	*	*	0.6	1.86	1.21	1.30	1.30
14.0	1	266LG-16SA01F140E	*	*	*	*	*	*	*	*	*	*	*	*	*	0.7	2.12	1.40	1.10	1.32
12.0	1	266LG-16SA01F120E	*	*	*	*	*	*	*	*	*	*	*	*	*	0.9	2.47	1.65	1.50	1.30
10.0	1	266LG-16SA01F100E	*	*	*	*	*	*	*	*	*	*	*	*	*	1.0	2.95	1.87	1.30	1.30
8.0	1	266LG-16SA01F080E	*	*	*	*	*	*	*	*	*	*	*	*	*	1.2	3.67	2.89	1.10	1.30
22	6.0	1	266LG-22SA01F060E	*	*	*	*	*	*	*	*	*	*	*	*	1.7	4.86	3.27	1.80	1.67
5.0	1	266LG-22SA01F050E	*	*	*	*	*	*	*	*	*	*	*	*	*	2.1	5.83	3.98	2.00	1.67
4.0	1	266LG-22SA01F040E	*	*	*	*	*	*	*	*	*	*	*	*	*	2.6	7.27	5.05	2.40	1.67

E

Inwendige rechtse draad

TPI	NT	Bestelcode	P		M		K		N		S		H		Afmetingen, mm					
			1020	1135	1020	1135	1020	1135	1020	1135	1020	1135	1020	1135	CF	HA	HB	PDX	PDY	
16	16.0	1	266RL-16SA01F160E	*	*	*	*	*	*	*	*	*	*	*	*	0.6	1.81	1.15	1.00	1.30
14.0	1	266RL-16SA01F140E	*	*	*	*	*	*	*	*	*	*	*	*	*	0.7	2.07	1.34	0.80	1.30
12.0	1	266RL-16SA01F120E	*	*	*	*	*	*	*	*	*	*	*	*	*	0.9	2.40	1.59	1.10	1.30
10.0	1	266RL-16SA01F100E	*	*	*	*	*	*	*	*	*	*	*	*	*	0.9	2.88	1.80	1.20	1.30
8.0	1	266RL-16SA01F080E	*	*	*	*	*	*	*	*	*	*	*	*	*	1.2	3.59	2.31	1.50	1.50
22	6.0	1	266RL-22SA01F060E	*	*	*	*	*	*	*	*	*	*	*	*	1.6	4.77	3.18	1.80	1.64
5.0	1	266RL-22SA01F050E	*	*	*	*	*	*	*	*	*	*	*	*	*	2.0	5.71	3.87	2.00	1.64
4.0	1	266RL-22SA01F040E	*	*	*	*	*	*	*	*	*	*	*	*	*	2.5	7.13	4.91	2.40	1.64
27	3.0	1	266RL-27SA01F030E	*	*	*	*	*	*	*	*	*	*	*	*	3.4	9.49	6.64	3.10	1.72

F

Inwendige linkse draad

TPI	NT	Bestelcode	P		M		K		N		S		H		Afmetingen, mm					
			1020	1135	1020	1135	1020	1135	1020	1135	1020	1135	1020	1135	CF	HA	HB	PDX	PDY	
16	12.0	1	266LL-16SA01F120E	*	*	*	*	*	*	*	*	*	*	*	*	0.9	2.40	1.59	1.20	1.32
10.0	1	266LL-16SA01F100E	*	*	*	*	*	*	*	*	*	*	*	*	*	0.9	2.88	1.80	1.50	1.52
8.0	1	266LL-16SA01F080E	*	*	*	*	*	*	*	*	*	*	*	*	*	1.2	3.59	2.31	1.05	1.30
22	6.0	1	266LL-22SA01F060E	*	*	*	*	*	*	*	*	*	*	*	*	1.6	4.77	3.18	1.80	1.64
5.0	1	266LL-22SA01F050E	*	*	*	*	*	*	*	*	*	*	*	*	*	2.0	5.71	3.87	2.00	1.64
4.0	1	266LL-22SA01F040E	*	*	*	*	*	*	*	*	*	*	*	*	*	2.5	7.13	4.91	2.40	1.64

G

R = Rechts, L = Links

H

