


CoroThread® 266 wisselplaat voor draadsnijden

ISO Trapezium 30° Aangeschuinde draadtop

STDNO
STDNO
TCTR

ISO 2901-2904
DIN 103-1977
7

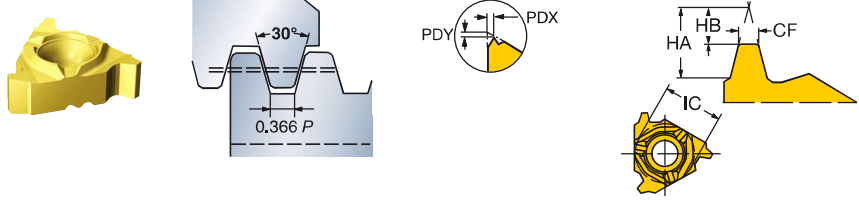

Uitwendige rechtse draad

TP	NT	Bestelcode	P		M		K		N		S		H		Afmetingen, mm					
			1020	1135	1020	1135	1020	1135	1020	1135	1020	1135	1020	1135	CF	HA	HB	PDX	PDY	
16	1.50	1	266RG-16TR01F150E	*	*	*	*	*	*	*	*	*	*	*	☆	0.5	1.85	0.88	1.00	1.32
	2.00	1	266RG-16TR01F200E	*	*	*	*	*	*	*	*	*	*	*	☆	0.6	2.44	1.13	1.10	1.32
	3.00	1	266RG-16TR01F300E	*	*	*	*	*	*	*	*	*	*	*	☆	1.0	3.63	1.82	1.60	1.23
22	4.00	1	266RG-22TR01F400E	*	*	*	*	*	*	*	*	*	*	*	☆	1.3	4.82	2.50	1.90	1.38
	5.00	1	266RG-22TR01F500E	*	*	*	*	*	*	*	*	*	*	*	☆	1.7	6.01	3.18	2.10	1.38
	6.00	1	266RG-22TR01F600E	*	*	*	*	*	*	*	*	*	*	*	☆	1.9	7.20	3.62	2.40	0.79
	7.00	1	266RG-22TR01F700E	*	*	*	*	*	*	*	*	*	*	*	☆	2.3	8.38	4.31	2.40	0.79
27	8.00	1	266RG-27TR01F800E	*	*	*	*	*	*	*	*	*	*	☆	2.7	9.57	5.00	3.30	0.54	

Uitwendige linkse draad

TP	NT	Bestelcode	P		M		K		N		S		H		Afmetingen, mm					
			1020	1135	1020	1135	1020	1135	1020	1135	1020	1135	1020	1135	CF	HA	HB	PDX	PDY	
16	1.50	1	266LG-16TR01F150E	*	*	*	*	*	*	*	*	*	*	*	☆	0.5	1.85	0.88	1.00	1.32
	2.00	1	266LG-16TR01F200E	*	*	*	*	*	*	*	*	*	*	*	☆	0.6	2.44	1.13	1.10	1.33
	3.00	1	266LG-16TR01F300E	*	*	*	*	*	*	*	*	*	*	*	☆	1.0	3.63	1.82	1.60	1.23
22	4.00	1	266LG-22TR01F400E	*	*	*	*	*	*	*	*	*	*	*	☆	1.3	4.82	2.50	1.90	1.38
	5.00	1	266LG-22TR01F500E	*	*	*	*	*	*	*	*	*	*	*	☆	1.7	6.01	3.18	2.10	1.38
	6.00	1	266LG-22TR01F600E	*	*	*	*	*	*	*	*	*	*	*	☆	1.9	7.20	3.62	2.40	0.79
	7.00	1	266LG-22TR01F700E	*	*	*	*	*	*	*	*	*	*	*	☆	2.3	8.38	4.31	2.40	0.79

Inwendige rechtse draad

TP	NT	Bestelcode	P		M		K		N		S		H		Afmetingen, mm					
			1020	1135	1020	1135	1020	1135	1020	1135	1020	1135	1020	1135	CF	HA	HB	PDX	PDY	
16	2.00	1	266RL-16TR01F200E	*	*	*	*	*	*	*	*	*	*	*	☆	0.6	2.41	1.08	1.10	1.30
	3.00	1	266RL-16TR01F300E	*	*	*	*	*	*	*	*	*	*	*	☆	0.9	3.59	1.76	1.60	1.21
	4.00	1	266RL-22TR01F400E	*	*	*	*	*	*	*	*	*	*	*	☆	1.3	4.77	2.45	1.90	1.35
22	5.00	1	266RL-22TR01F500E	*	*	*	*	*	*	*	*	*	*	*	☆	1.7	5.96	3.13	2.10	1.35
	6.00	1	266RL-22TR01F600E	*	*	*	*	*	*	*	*	*	*	*	☆	1.9	7.14	3.56	2.40	0.77
	7.00	1	266RL-22TR01F700E	*	*	*	*	*	*	*	*	*	*	*	☆	2.3	8.32	4.25	2.40	0.96
	27	8.00	1	266RL-27TR01F800E	*	*	*	*	*	*	*	*	*	*	☆	2.6	9.49	4.93	3.30	0.54

Inwendige linkse draad

TP	NT	Bestelcode	P		M		K		N		S		H		Afmetingen, mm					
			1020	1135	1020	1135	1020	1135	1020	1135	1020	1135	1020	1135	CF	HA	HB	PDX	PDY	
16	2.00	1	266LL-16TR01F200E	*	*	*	*	*	*	*	*	*	*	*	☆	0.6	2.41	1.08	1.20	1.30
	3.00	1	266LL-16TR01F300E	*	*	*	*	*	*	*	*	*	*	*	☆	0.9	3.59	1.76	1.35	1.45
22	4.00	1	266LL-22TR01F400E	*	*	*	*	*	*	*	*	*	*	*	☆	1.3	4.77	2.45	1.90	1.35
	5.00	1	266LL-22TR01F500E	*	*	*	*	*	*	*	*	*	*	*	☆	1.7	5.96	3.13	2.10	1.35
	6.00	1	266LL-22TR01F600E	*	*	*	*	*	*	*	*	*	*	*	☆	1.9	7.14	3.56	2.40	0.77
	7.00	1	266LL-22TR01F700E	*	*	*	*	*	*	*	*	*	*	*	☆	2.3	8.32	4.25	2.40	0.96

R = Rechts, L = Links

