


T-Max® P kop voor draaien

Kantelpentype

CoroTurn® HP - Precisie koelmiddeltoevoer

KAPR

93,0°

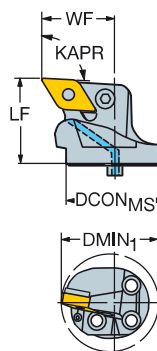

- DNMM, DNMX
- DNMG
- DNMA, DNGA

B

C

							Afmetingen, mm					
	CZC _{MS}	DMIN ₁	RMPX	CNSC	Bestelnummer	DCON _{MS}	LF	WF	BAR	NM	KG	MIID
11	25	38,0	27°	1	SL-PDUNR/L-25-11HP-G	25,0	32,0	21,0	80	2,0	0,10	DNMG 11 04 08
	32	40,0	27°	1	SL-PDUNR/L-32-11HP	32,0	32,0	22,0	80	2,0	0,13	DNMG 11 04 08
15	40	56,0	27°	1	SL-PDUNR/L-40-15HP	40,0	36,0	30,0	80	5,0	0,24	DNMG 15 06 08

D

-G geeft gewijzigde hoofdimensies aan

R = Rechts, L = Links

Reserve onderdelen						
Bestelnummer	Kantelpen	Schroef	Onderlegplaat	Pen voor onderlegplaat	Pasbus	Spuitmond
SL-PDUNR/L-25-11HP-G	5432 015-021	438.3-830			5552 058-02	5691 026-13
SL-PDUNR/L-32-11HP	5432 001-01	174.3-820M	5322 255-01	174.3-860	5638 031-01	5691 026-03
SL-PDUNR/L-40-15HP	174.3-847M	174.3-830	171.35-851M	174.3-861	5638 031-01	5691 026-03

E

Ga voor de complete lijst van reserveonderdelen naar www.sandvik.coromant.com

F

G

H

