



NOGANT

UBURR SERIES
MACHINE TOOLS

UBURR THE MACHINE DEBURRING TOOL

UBurr deburring tools provide you with an innovating way to remove your burrs.

UBurr deburring tools providing a quick, effective, reliable and consistent deburring way of front and back side bore edges of a drilled hole in one single pass.

A simple and efficient spring mechanism for inserting and removing the blade. Special blade sharpening that preserves the hole bore.

UBurr tools range remove burrs with an efficient and consistent way.

This solution is faster, easier, and more economical for your hole deburring problems for a mass production process.

UBurr deburring tool is a great choice for batch runs or in a production environment when a reliable and stable performance is required.

UBurr deburring tools radially removes the burrs off the bore edges, without requiring the workpiece to be turned or the spindle to be stopped.

The tool blade designed to easily deburr unwanted material from the front and back side of the holes in seconds.

The tool blade designed to protect the hole bore and to unarm the internal surface.


The UBurr standard tool series range from Ø3 mm up to Ø25mm.

Custom made tools can be made for your specific applications.

UBURR COMPLETE SETS TOOL & BLADE

Cat. No.	Tool No.	Blade No.	Description	Hole Diameter d	Shank Diameter D	LTB*	H	L
UB3000	UB1030	UB2030	NMT-UB-d030-H29-D08-L85 + B	3	8	9.3	29	85
UB3001	UB1035	UB2030	NMT-UB-d035-H29-D08-L85 + B	3.5	8	9.3	29	85
UB3002	UB1040	UB2030	NMT-UB-d040-H43-D08-L90 + B	4	8	12.2	43	90
UB3003	UB1045	UB2030	NMT-UB-d045-H43-D08-L90 + B	4.5	8	12.2	43	90
UB3004	UB1050	UB2030	NMT-UB-d050-H53-D08-L115 + B	5	8	13.2	53	115
UB3005	UB1055	UB2060	NMT-UB-d055-H53-D08-L115 + B	5.5	8	13.2	53	115
UB3006	UB1060	UB2060	NMT-UB-d060-H53-D08-L115 + B	6	8	11.6	53	115
UB3007	UB1065	UB2060	NMT-UB-d065-H53-D08-L115 + B	6.5	8	11.6	53	115
UB3008	UB1070	UB2060	NMT-UB-d070-H53-D08-L115 + B	7	10	11.6	53	115
UB3009	UB1075	UB2060	NMT-UB-d075-H53-D08-L115 + B	7.5	10	11.6	53	115
UB3010	UB1080	UB2060	NMT-UB-d080-H53-D10-L115 + B	8	10	11.6	53	115
UB3011	UB1085	UB2060	NMT-UB-d085-H53-D10-L115 + B	8.5	10	11.6	53	115
UB3012	UB1090	UB2060	NMT-UB-d090-H53-D10-L115 + B	9	10	11.6	53	115
UB3013	UB1095	UB2060	NMT-UB-d090-H53-D10-L115 + B	9.5	10	11.6	53	115
UB3014	UB1100	UB2060	NMT-UB-d0100-H63-D10-L125+B	10	10	13.3	80	125
UB3015	UB1105	UB2060	NMT-UB-d0105-H63-D10-L125+B	10.5	12	13.3	80	125
UB3016	UB1110	UB2060	NMT-UB-d0110-H63-D10-L125+B	11	12	13.3	80	125
UB3017	UB1115	UB2060	NMT-UB-d0115-H63-D10-L125+B	11.5	12	13.3	80	125
UB3018	UB1120	UB2060	NMT-UB-d0120-H63-D12-L125+B	12	12	13.3	80	125
UB3019	UB1125	UB2060	NMT-UB-d0125-H63-D12-L125+B	12.5	12	13.3	80	125

* Custom made tools can be made for your specific applications | * Length to bottom



Blade Item No.	For Hole Diameter d mm
UB2030	4.5 - 3.0
UB2060	25.0 - 5.0

TOOL

NMT NOGA Machine Tools	UB - UBURR	d-Hole Diameter	H-Neck Down Length	D Shank Diameter	L Total Length
------------------------	------------	-----------------	--------------------	------------------	----------------





CUTTING CONDITIONS

- P** Steel
- M** Stainless Steel
- K** Cast Iron
- N** Aluminum
- S** Titanium/Inconel
- H** Hard Material

HSS		HSS + COATING TiN *	
Vc=m/min	Fz=mm/tooth	Vc=m/min	Fz=mm/tooth
45.0 - 25.0	0.1 - 0.05	65.0 - 45.0	0.1 - 0.05
30.0 - 15.0	0.08 - 0.05	55.0 - 30.0	0.08 - 0.05
35.0 - 20.0	0.1 - 0.05	55.0 - 35.0	0.1 - 0.05
60.0 - 40.0	0.12 - 0.05	75.0 - 50.0	0.12 - 0.05
15.0 - 10.0	0.08 - 0.05	20.0 - 15.0	0.08 - 0.05
30.0 - 15.0	0.08 - 0.05	35.0 - 20.0	0.08 - 0.05

* Coated blades on request

UBURR: THE TOOL PATH

ONE PASS SOLUTION TO HOLE-DEBURRING

1

The **UBURR** tools remove the burr from the front hole surface by a unique flexible blade.




2

The **UBURR** blade enters into the tool pocket automatically as the pressure is increasing on the blade.

The unique geometry prevents the blade to damage the surface inside the hole.


3

The **UBURR** tools remove the burr from the back hole surface with the same spindle direction by going up.

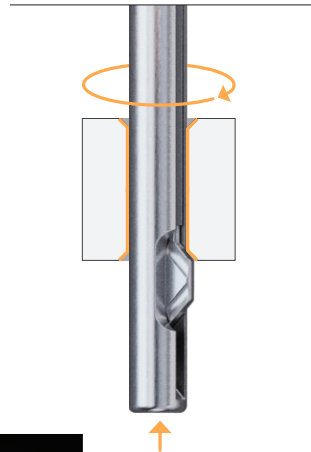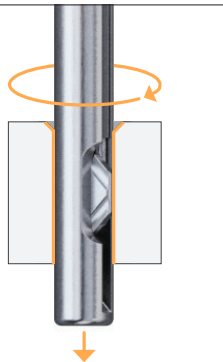

BLADE INSERTION


- 1 Insert the blade into the holder slot until the blade stops at the holder pin.



- 2 Push the blade into the tool pocket.




- 3 Lock the screw clockwise.

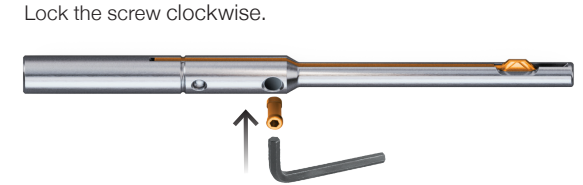


BLADE REMOVAL


- 1 Remove the blade: Unlock the screw with Allen Key counter-clockwise turn of the locking screw.

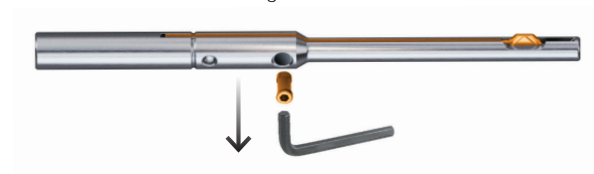

- 2 Push the blade by hexagon key through the technical hole.

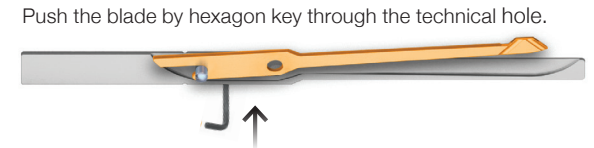

- 3 Pull up the blade from the holder.



UBURR TOOLS & BLADES



UBURR

Deburring the front and back of a drilled through hole.

UBurr deburring tools providing a quick, effective, reliable and consistent deburring way of front and back side bore edges of a drilled hole in one single pass

Efficient and convenient tools for long-term work and competitive price.

Ø3 mm up to Ø25 mm

★ Custom made tools available on request

Tool Item No.	Description	Hole Diameter d	Shank Diameter D	LTB*	H	L
UB1030	NMT-UB-d030-H29-D08-L85	3	8	9.3	29	85
UB1035	NMT-UB-d035-H29-D08-L85	3.5	8	9.3	29	85
UB1040	NMT-UB-d040-H43-D08-L90	4	8	12.2	43	90
UB1045	NMT-UB-d045-H43-D08-L90	4.5	8	12.2	43	90
UB1050	NMT-UB-d050-H46-D08-L90	5	8	13.2	46	90
UB1055	NMT-UB-d055-H46-D08-L90	5.5	8	13.2	46	90
UB1060	NMT-UB-d060-H53-D08-L115	6	8	11.6	53	115
UB1065	NMT-UB-d065-H53-D08-L115	6.5	8	11.6	53	115
UB1070	NMT-UB-d070-H53-D10-L115	7	10	11.6	53	115
UB1075	NMT-UB-d075-H53-D10-L115	7.5	10	11.6	53	115
UB1080	NMT-UB-d080-H53-D10-L115	8	10	11.6	53	115
UB1085	NMT-UB-d085-H53-D10-L115	8.5	10	11.6	53	115
UB1090	NMT-UB-d090-H53-D10-L115	9	10	11.6	53	115
UB1095	NMT-UB-d095-H80-D10-L125	9.5	10	13.3	80	125
UB1100	NMT-UB-d100-H80-D10-L125	10	10	13.3	80	125
UB1105	NMT-UB-d105-H80-D12-L125	10.5	12	13.3	80	125
UB1110	NMT-UB-d110-H80-D12-L125	11	12	13.3	80	125
UB1115	NMT-UB-d115-H80-D12-L125	11.5	12	13.3	80	125
UB1120	NMT-UB-d120-H80-D12-L125	12	12	13.3	80	125
UB1125	NMT-UB-d125-H80-D12-L125	12.5	12	13.3	80	125
UB1130	NMT-UB-d130-H80-D16-L125	13	16	13.3	80	125
UB1135	NMT-UB-d135-H80-D16-L125	13.5	16	13.3	80	125
UB1140	NMT-UB-d140-H80-D16-L125	14	16	13.3	80	125
UB1145	NMT-UB-d145-H80-D16-L125	14.5	16	13.3	80	125
UB1150	NMT-UB-d150-H80-D16-L125	15	16	13.3	80	125
UB1155	NMT-UB-d155-H80-D16-L125	15.5	16	13.3	80	125
UB1160	NMT-UB-d160-H80-D16-L125	16	16	13.3	80	125
UB1165	NMT-UB-d165-H80-D16-L125	16.5	16	13.3	80	125
UB1170	NMT-UB-d170-H80-D16-L125	17	16	13.3	80	125
UB1175	NMT-UB-d175-H80-D16-L125	17.5	16	13.3	80	125
UB1180	NMT-UB-d180-H80-D16-L125	18	16	13.3	80	125
UB1185	NMT-UB-d185-H80-D16-L125	18.5	16	13.3	80	125
UB1190	NMT-UB-d190-H80-D16-L125	19	16	13.3	80	125
UB1195	NMT-UB-d195-H80-D20-L125	19.5	20	13.3	80	125
UB1200	NMT-UB-d200-H80-D20-L125	20	20	13.3	80	125
UB1205	NMT-UB-d205-H80-D20-L125	20.5	20	13.3	80	125
UB1210	NMT-UB-d210-H80-D20-L125	21	20	13.3	80	125
UB1215	NMT-UB-d215-H80-D20-L125	21.5	20	13.3	80	125
UB1220	NMT-UB-d220-H80-D20-L125	22	20	13.3	80	125
UB1225	NMT-UB-d225-H80-D25-L125	22.5	25	13.3	80	125
UB1230	NMT-UB-d230-H80-D25-L125	23	25	13.3	80	125
UB1235	NMT-UB-d235-H80-D25-L125	23.5	25	13.3	80	125
UB1240	NMT-UB-d240-H80-D25-L125	24	25	13.3	80	125
UB1245	NMT-UB-d245-H80-D25-L125	24.5	25	13.3	80	125
UB1250	NMT-UB-d250-H80-D25-L125	25	25	13.3	80	125

Blade Item No.	Blade Description	For Hole Diameter d mm
UB2030	NMT-UB-B 030-045 HSS	3.0-4.5
UB2030	NMT-UB-B 030-045 HSS	3.0-4.5
UB2030	NMT-UB-B 030-045 HSS	3.0-4.5
UB2030	NMT-UB-B 030-045 HSS	3.0-4.5
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0
UB2060	NMT-UB-B 050-250 HSS	5.0-25.0

★ All measurements are in mm unless mentioned otherwise | * Length to bottom

All NOGA products meet the strict requirements of ISO 9001 and ISO 14001.

NOGA reserves the right to make changes in any of its products without prior notice.
© Copyright NOGA Engineering & Technology (2008) Ltd. All rights reserved. No part of this publication may be reproduced, transcribed, stored in an electronic retrieval system, translated into any language or computer language, or be transmitted in any form whatsoever without the prior written consent of the publisher.

**We invite you to visit our website:
WWW.NOGAMT.COM for further information.**

NOGA ENGINEERING & TECHNOLOGY (2008) LTD
P.O.B 55 Dora Industrial Park, Shlomi 2283200, Israel
Tel: 972-4-9808080 | Fax: 972-4-9808638 | E-mail: noga@noga.com

NOGA TOOLS B.V.
Segment 20, 6921 RH Duiven, Netherlands
Tel: +31 26 3194636 | E-mail: info@nogatools.nl | Website: www.nogatools.nl

