


D VHM-Spiralbohrer
Speeddrill Universal,
extra lang 25xD, mit
Innenkühlung

E Solid carbide stub drills
Speeddrill Universal, extra
long series 25xD, internal
coolant supply

I Punte elicoidali MDI
Speeddrill Universali, serie
extra lunga 25xD, con fori
lubrificazione



VHM-Bohrer
Solid carbide drills
Punte elicoidali in metallo duro integrale

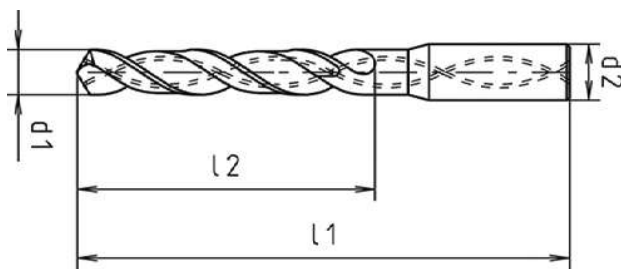

ALUNIT-S®

| d1 _{h7} mm | d2 _{h6} mm | l1 mm | l2 mm | Z | Code 6797 Art.-Nr. |
|------------------------|------------------------|----------|----------|---|-----------------------|
| 3,00 | 6,00 | 135 | 98 | 2 | 0679700300100 |
| 4,00 | 6,00 | 160 | 120 | 2 | 0679700400100 |
| 5,00 | 6,00 | 180 | 135 | 2 | 0679700500100 |
| 6,00 | 6,00 | 205 | 168 | 2 | 0679700600100 |
| 8,00 | 8,00 | 260 | 220 | 2 | 0679700800100 |
| 10,00 | 10,00 | 310 | 268 | 2 | 0679701000100 |
| 12,00 | 12,00 | 375 | 325 | 2 | 0679701200100 |

Optional ohne Aufpreis auch mit Weldon-Schaft (DIN 6535-HB) lieferbar. / Also available with Weldon-shank (DIN 6535-HB) without extra charge. / Anche disponibili con attacco Weldon (DIN 6535-HB) senza prezzo aggiuntivo. d1 ≥ 3,0 mm | d2 ≥ 6,0 mm.

Details zum Sonderanschliff: Siehe Kapitel „Technische Informationen“ / Details on the special point shape: See chapter „Technical information“ / Dettagli sulla affilatura speciale: Capitolo „Informazioni tecniche“