


## BSF - HSSG - Korte tap


Artikelnr.: 5217

- Draairichting: rechts
- Spaangroeven: recht (zonder schilaansnijding)
- Ingang: 3-4 spoed
- Type: Form C
- Boringen: doorlopend & blind
- Gebruik: standaard tot 900N/mm<sup>2</sup> - 27 HRC

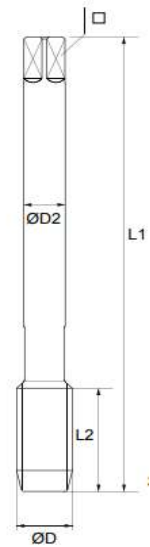

### Prototap

Artikelnr: **5217**

<b>BSF</b>	D1	D2	L1	L2	□	
<b>BSF 3/16 x 32</b>	4,76	6,0	50	14	4,9	3,90
<b>BSF 1/4 x 26</b>	6,35	6,0	50	18	4,9	5,30
<b>BSF 5/16 x 22</b>	7,94	6,0	56	22	4,9	6,80
<b>BSF 3/8 x 20*</b>	9,53	7,0	63	22	5,5	8,30
<b>BSF 7/16 x 18</b>	11,11	8,0	63	22	6,2	9,70
<b>BSF 1/2 x 16</b>	12,70	9,0	75	24	7,0	11,10
<b>BSF 9/16 x 16</b>	14,29	11,0	80	28	9,0	12,70
<b>BSF 5/8 x 14</b>	15,88	12,0	80	28	9,0	14,00
<b>BSF 3/4 x 12</b>	19,05	14,0	95	32	11,0	16,80
<b>BSF 7/8 x 11</b>	22,23	18,0	100	36	14,5	19,70
<b>BSF 1" x 10</b>	25,40	18,0	110	40	14,5	22,70

\* BSF 3/8 = Fisher thread