
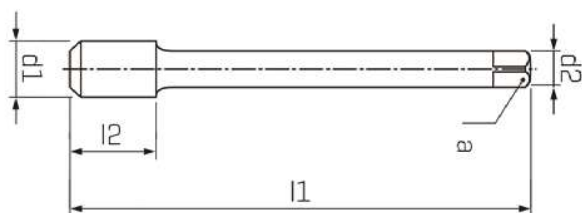



D Maschinengewindebohrer
gerade genutet, für
Whitworth-Rohrgewinde
DIN ISO 228

E Machine taps straight
fluted, for whitworth pipe
threads DIN ISO 228

I Maschi a macchina
scanalature diritte, per
filettatura whitworth per
tubi, DIN ISO 228

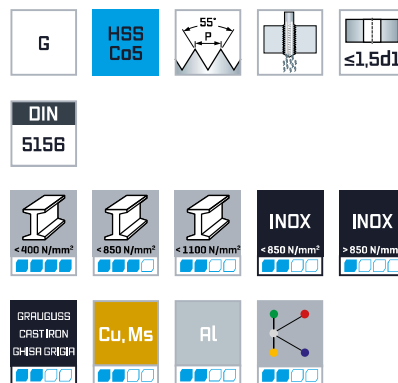

d1 mm	P Gg/1"	l1 mm	l2 mm	d2 mm	a _{h12} mm		Code 5204 Art.-Nr.
G 1/8"	28	90	20	7	5,5	Ø 8,8	0520401600100
G 1/4"	19	100	22	11	9	Ø 11,8	0520402000100
G 3/8"	19	100	22	12	9	Ø 15,25	0520402400100
G 1/2"	14	125	25	16	12	Ø 19	0520402800100
G 5/8"	14	125	25	18	14,5	Ø 21	0520403200100
G 3/4"	14	140	28	20	16	Ø 24,5	0520403400100
G 7/8"	14	150	28	22	18	Ø 28,25	0520403600100
G 1"	11	160	30	25	20	Ø 30,75	0520403800100



HSS-Gewindewerkzeuge
HSS taps and dies
HSS maschi e filetti