


V2 Power staal voor de universele bewerking van staal



★★★

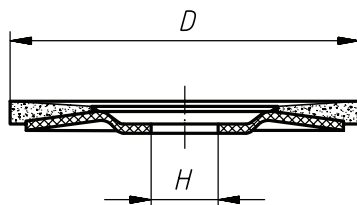

Bestelvoorbeeld: A27441000401465

 $v_{max.}: 80 \text{ m/s}$

ZK = Zirkoniumkorund

ZKS = Zirkoniumkorund met
slijpactieve deking


PG 5

Artikelnummer	Benaming	Korrel	D mm	H mm	n max. (1/min)	Toepassingsadvies Informatie op blz 438		
A27441000401465	V2 POWER 100	ZK 40	100	16	15.300	① ② ③ ④ ⑤ ⑥ ⑦ ⑧	■	10
A27441000601465	V2 POWER 100	ZK 60	100	16	15.300	① ② ③ ④ ⑤ ⑥ ⑦ ⑧	■	10
A27441150401465	V2 POWER 115	ZK 40	115	22,23	13.300	① ② ③ ④ ⑤ ⑥ ⑦ ⑧	■	10
A27441150601465	V2 POWER 115	ZK 60	115	22,23	13.300	① ② ③ ④ ⑤ ⑥ ⑦ ⑧	■	10
A27441250401465	V2 POWER 125	ZK 40	125	22,23	12.200	① ② ③ ④ ⑤ ⑥ ⑦ ⑧	■	10
A27441250601465	V2 POWER 125	ZK 60	125	22,23	12.200	① ② ③ ④ ⑤ ⑥ ⑦ ⑧	■	10
A27441780401465	V2 POWER 178	ZK 40	178	22,23	8.500	① ② ③ ④ ⑤ ⑥ ⑦ ⑧	■	10
A27441780601465	V2 POWER 178	ZK 60	178	22,23	8.500	① ② ③ ④ ⑤ ⑥ ⑦ ⑧	■	10
A27442300401418	V2 POWER 230	ZKS 40	230	22,23	6.600	① ② ③ ④ ⑤ ⑥ ⑦ ⑧	■	5

Eigenschappen:


- extreem robuuste korrel met hoge drukvastheid

Slijpen, polijsten
(flexibel)

V2 Power ALU




★★★

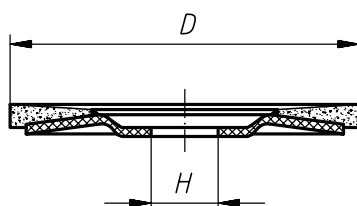

Bestelvoorbeeld: A27441150361434

 $v_{max.}: 80 \text{ m/s}$

SIC = Siliciumcarbide



PG 5

Artikelnummer	Benaming	Korrel	D mm	H mm	n max. (1/min)	Toepassingsadvies Informatie op blz 438		
A27441150361434	V2 POWER 115	SIC 36	115	22,23	13.300	⑥ ⑦ ⑧	■	10
A27441150401434	V2 POWER 115	SIC 40	115	22,23	13.300	⑥ ⑦ ⑧	■	10
A27441250361434	V2 POWER 125	SIC 36	125	22,23	12.200	⑥ ⑦ ⑧	■	10
A27441250401434	V2 POWER 125	SIC 40	125	22,23	12.200	⑥ ⑦ ⑧	■	10
A27441780241434	V2 POWER 178	SIC 24	178	22,23	8.500	⑥ ⑦ ⑧	■	10
A27441780361434	V2 POWER 178	SIC 36	178	22,23	8.500	⑥ ⑦ ⑧	■	10

Eigenschappen:

- siliciumcarbide (SIC) is uitstekend geschikt voor de voor- en nabewerking van lasnaden in uiteenlopende aluminiumlegeringen
- siliciumcarbide (SIC) is ook bij uitstek geschikt voor de bewerking van moderne materialen zoals CVK of GVK