





**A15 S**  
TICN

Voorraad artikel

**DIN 371**  
≤ M10

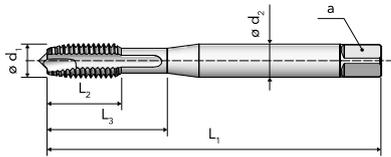

**DIN 376**  
≥ M11

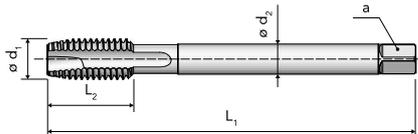

UTILISATION - VITESSE DE COUPE m/min

ISO	MG	A15 S TICN
P	P.2	● 30-35
	P.3	● 25-30
	P.4	● 20-25
	P.5	● 10-15
	P.7	● 10-15
M	M.1	● 10-15
K	K.2	● 25-30
N	N.2-3	● 30-35
	N.6	● 25-30



$\varnothing d_1$	P	$L_1$ js 16	$L_2$	$L_3$	$\varnothing d_2$	a	Z		A15 S TICN
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[-]	[mm]	
M 2	0,4	45	7	11	2,8	2,1	2	1,6	●
2,2	0,45	45	8	13	2,8	2,1	2	1,75	
2,3	0,4	45	8	13	2,8	2,1	2	1,9	
2,5	0,45	50	9	15	2,8	2,1	3	2,05	●
2,6	0,45	50	9	15	2,8	2,1	3	2,1	
3	0,5	56	10	18	3,5	2,7	3	2,5	●
3,5	0,6	56	11	20	4	3	3	2,9	●
4	0,7	63	12	21	4,5	3,4	3	3,3	●
5	0,8	70	14	24,5	6	4,9	3	4,2	●
6	1	80	16	29	6	4,9	3	5	●
7	1	80	16	29	7	5,5	3	6	●
8	1,25	90	18	33	8	6,2	3	6,8	●
9	1,25	90	18	33	9	7	3	7,8	●
10	1,5	100	20	36	10	8	3	8,5	●
11	1,5	100	22	-	8	6,2	3	9,5	
12	1,75	110	24	-	9	7	4	10,2	●
14	2	110	25	-	11	9	4	12	●
16	2	110	28	-	12	9	4	14	●
18	2,5	125	32	-	14	11	4	15,5	●
20	2,5	140	32	-	16	12	4	17,5	●
22	2,5	140	32	-	18	14,5	4	19,5	●
24	3	160	36	-	18	14,5	4	21	●
27	3	160	36	-	20	16	4	24	●
30	3,5	180	40	-	22	18	4	26,5	●
33	3,5	180	40	-	25	20	5	29,5	
36	4	200	55	-	28	22	5	32	