




A70 S
TiCN


Voorraad artikel

A SERIES

DIN 371
≤ M10

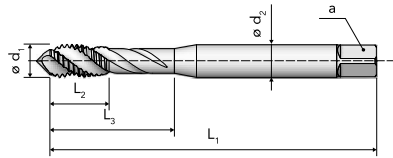

DIN 376
≥ M11

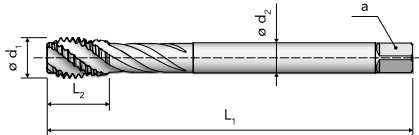

UTILISATION - VITESSE DE COUPE m/min

ISO	MG	A70 S TiCN
P	P.2	● 25-30
	P.3	● 20-25
	P.4	● 15-20
	P.5	● 5-10
	P.7	● 8-10
M	M.1	● 8-10
K	K2	● 20-25
N	N.3	● 25-30
	N.6	● 25-30



Ød ₁	P	L ₁ js 16	L ₂	L ₃	Ød ₂ h9	a h12	Z		A70 S TiCN
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[-]	[mm]	
M 2	0,4	45	6	12	2,8	2,1	3	1,6	●
2,5	0,45	50	6,5	15	2,8	2,1	3	2,05	●
3	0,5	56	7	15	3,5	2,7	3	2,5	●
3,5	0,6	56	8	18,5	4	3	3	2,9	●
4	0,7	63	8,5	21	4,5	3,4	3	3,3	●
5	0,8	70	10	24,5	6	4,9	3	4,2	●
6	1	80	12	29	6	4,9	3	5	●
7	1	80	12	29	7	5,5	3	6	●
8	1,25	90	15	33	8	6,2	3	6,8	●
9	1,25	90	15	33	9	7	3	7,8	●
10	1,5	100	17,5	38	10	8	3	8,5	●
11	1,5	100	17,5	-	8	6,2	3	9,5	●
12	1,75	110	18	-	9	7	4	10,2	●
14	2	110	20,5	-	11	9	4	12	●
16	2	110	20,5	-	12	9	4	14	●
18	2,5	125	25,5	-	14	11	4	15,5	●
20	2,5	140	29,5	-	16	12	4	17,5	●
22	2,5	140	29,5	-	18	14,5	4	19,5	●
24	3	160	35,5	-	18	14,5	4	21	●
27	3	160	37,5	-	20	16	5	24	●
30	3,5	180	42	-	22	18	5	26,5	●
33	3,5	180	43,5	-	25	20	5	29,5	
36	4	200	47	-	28	22	5	32	
42	4,5	200	55	-	32	24	6	37,5	
48	5	250	59,5	-	36	29	6	43	
52	5	250	59,5	-	40	32	6	47	