




A6
NEUTRE

A SERIES

NORME VERGNANO

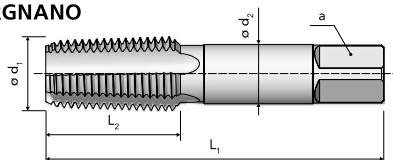

UTILISATION - VITESSE DE COUPE m/min

ISO	MG	A6 NEUTRE			
P	P.2	• 10-15			
	P.3	• 10-12			
	P.4	• 8-10			
K	K.2	• 10-12			



Rc	P	Ød ₁	L ₁ js 16	L ₂	L ₃	Ød ₂ h9	a h12	Z		A6 NEUTRE
	[Sp/1"]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[-]	[mm]	
1/8"	28	9,728	63	17,5	-	7	5,5	4	8,2 (a)	•
1/4"	19	13,157	63	23,5	-	11	9	4	11 (a)	•
3/8"	19	16,662	70	24	-	12	9	4	14,5 (a)	•
1/2"	14	20,955	80	29	-	16	12	4	18 (a)	•
3/4"	14	26,441	100	32	-	20	16	5	23,5 (a)	•
1"	11	33,249	110	36	-	25	20	5	29,5 (a)	•
1 1/4"	11	41,91	125	44	-	32	24	5	38 (a)	•
1 1/2"	11	47,803	140	46	-	36	29	6	44 (a)	•
2"	11	59,614	160	50	-	45	35	6	55,5 (a)	•

(a)= avant trou cylindrique (voir page 254)