


Tr - HSSG - tap DIN103


Artikelnr.: 5320

- Draairichting: rechts
- Spaangroeven: recht (zonder schilaansnijding)
- Ingang: speciaal
- Boringen: doorlopend 1,0 x D
- Gebruik: standaard tot 700N/mm²

Prototap

Artikelnr: **5320**

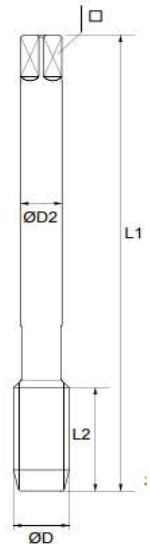

TR	D2	L1	L2	□	
TR 8 x 1,5	6,0	90,0	55	4,9	6,70
TR 9 x 2	7,0	110,0	63	5,5	7,20
TR 10 x 2	7,0	110,0	63	5,5	8,20
TR 10 x 3	7,0	125,0	75	5,5	7,60
TR 12 x 2	9,0	135,0	75	7,0	10,20
TR 12 x 3	8,0	165,0	111	6,2	9,25
TR 14 x 2	10,0	150	90	8,0	12,20
TR 14 x 3	10,0	140	85	8,0	11,25
TR 14 x 4	10,0	170	112	8,0	10,70
TR 16 x 2	12,0	160	90	9,0	14,20
TR 16 x 4	11,0	180	116	9,0	12,25
TR 18 x 2	14,0	175	90	11,0	16,20
TR 18 x 4	12,0	190	120	9,0	14,25
TR 20 x 2	16,0	185	105	12,0	18,20
TR 20 x 4	14,0	200	124	11,0	16,25
TR 22 x 3	16,0	220	125	12,0	19,25
TR 22 x 4	16,0	210	130	12,0	18,25
TR 22 x 5	16,0	235	155	12,0	17,30
TR 24 x 3	18,0	220	130	14,5	21,25
TR 24 x 5	18,0	245	160	14,5	19,30
TR 26 x 3	20,0	235	130	16,0	23,25
TR 26 x 5	20,0	255	165	16,0	21,30


Tr - HSSG - tap


Artikelnr.: 5320

- Draairichting: rechts
- Spaangroeven: recht (zonder schilaansnijding)
- Ingang: speciaal
- Boringen: doorlopend 1,0 x D
- Gebruik: standaard tot 700N/mm²

Prototap

Artikelnr: **5320**

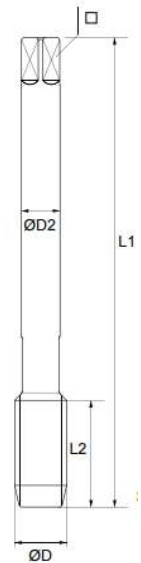

TR	D2	L1	L2	□	
TR 28 x 3	22,0	245	140	18,0	25,25
TR 28 x 5	22,0	265	170	18,0	23,30
TR 30 x 3	22,0	250	140	18,0	27,25
TR 30 x 6	22,0	290	185	18,0	24,30
TR 32 x 6	25,0	300	191	20,0	26,30
TR 36 x 6	28,0	310	200	22,0	30,50