


UNC - HSSE - Machinetappen



Artikelnr.: 5216

- Draairichting: rechts
- Spaangroeven: HELIX 35°
- Ingang: 2-3 spoed
- Boringen: doorlopend
- Gebruik: standaard tot 900N/mm² - 27 HRC

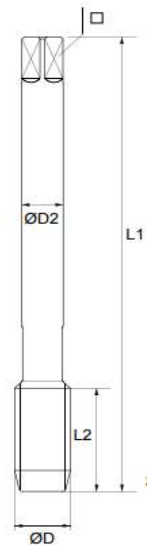

Prototap

Artikelnr: **5216**

UNC	D1	D2	L1	L2		
DIN 371						
UNC No 2 x 56	2,18	2,8	45	8	2,1	1,85
UNC No 3 x 48	2,52	2,8	50	9	2,1	2,10
UNC No 4 x 40	2,85	3,5	50	10	2,7	2,30
UNC No 5 x 40	3,18	3,5	56	11	2,7	2,60
UNC No 6 x 32	3,51	4,0	56	12	3,0	2,85
UNC No 8 x 32	4,17	4,5	63	13	3,4	3,50
UNC No 10 x 24	4,83	6,0	70	15	4,9	3,90
UNC No 12 x 24	5,49	6,0	70	16	4,9	4,50
UNC 1/4 x 20	6,35	7,0	80	17	5,5	5,20
UNC 5/16 x 18	7,94	8,0	90	20	6,2	6,60
UNC 3/8 x 16	9,53	9,0	100	22	7,0	8,00
DIN 376						
UNC 7/16 x 14	11,11	8,0	100	22	6,2	9,40
UNC 1/2 x 13	12,70	9,0	110	25	7,0	10,80
UNC 9/16 x 12	14,29	11,0	110	26	9,0	12,20
UNC 5/8 x 11	15,88	12,0	110	27	9,0	13,50
UNC 3/4 x 10	19,05	14,0	125	30	11,0	16,50
UNC 7/8 x 9	22,23	18,0	140	32	14,5	19,50
UNC 1" x 8	25,40	20,0	160	36	16,0	22,25
UNC 1.1/4 x 7	31,75	22,0	180	40	18,0	28,25
UNC 1.1/2 x 6	38,10	32,0	200	50	24,0	34,00
UNC 1.3/4 x 5	44,45	36,0	220	65	29,0	39,50
UNC 2" x 4,5	50,80	40,0	250	70	32,0	45,00