
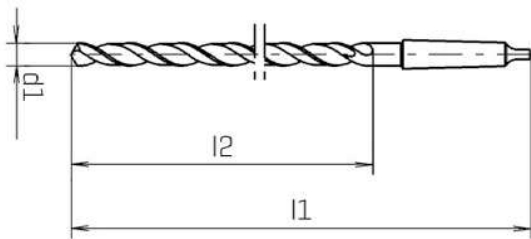


D Spiralbohrer überlang, mit Morsekegel, DIN 1870 R1 RN

E Morse taper shank drills, extra long series, DIN 1870 R1 RN

I Punta elicoidali serie extra lunga, cono morse DIN 1870 L1 RN

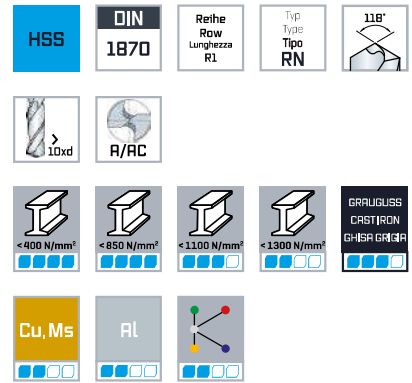

STEAMED					
d1 _{h8} mm	l1 mm	l2 mm		Code 262 Art.-Nr.	
8,00	265	165	1	0026200800100	1
9,00	275	175	1	0026200900100	1
10,00	285	185	1	0026201000100	1
11,00	300	195	1	0026201100100	1
12,00	310	205	1	0026201200100	1
13,00	310	205	1	0026201300100	1
14,00	325	220	1	0026201400100	1
14,50	340	220	2	0026201450100	1
15,00	340	220	2	0026201500100	1
15,50	355	230	2	0026201550100	1
16,00	355	230	2	0026201600100	1
16,50	355	230	2	0026201650100	1
17,00	355	230	2	0026201700100	1
17,50	370	245	2	0026201750100	1
18,00	370	245	2	0026201800100	1

STEAMED					
d1 _{h8} mm	l1 mm	l2 mm		Code 262 Art.-Nr.	
18,50	370	245	2	0026201850100	1
19,00	370	245	2	0026201900100	1
19,50	385	260	2	0026201950100	1
20,00	385	260	2	0026202000100	1
21,00	385	260	2	0026202100100	1
22,00	405	270	2	0026202200100	1
23,00	405	270	2	0026202300100	1
24,00	440	290	3	0026202400100	1
25,00	440	290	3	0026202500100	1
26,00	440	290	3	0026202600100	1
27,00	460	305	3	0026202700100	1
28,00	460	305	3	0026202800100	1
29,00	460	305	3	0026202900100	1
30,00	460	305	3	0026203000100	1

Kreuzanschliff / Split Point / Affilatura diamante AC ≤ Ø 16,0 mm
 Anschliff / Point Shape / Affilatura forma A > Ø 16,0 mm


D Spiralbohrer mit Morsekegel überlang, DIN 1870 R2 RN

E Morse taper shank drills, extra long series, DIN 1870 R2 RN

I Punta elicoidali serie extra lunga, cono morse, DIN 1870 L2 RN



HSS	DIN 1870	Reihe Row Lunghezza R2	Typ Tipo Tipo RN	118°
				GRAUGUSS CASTIRON GHSA GR13A

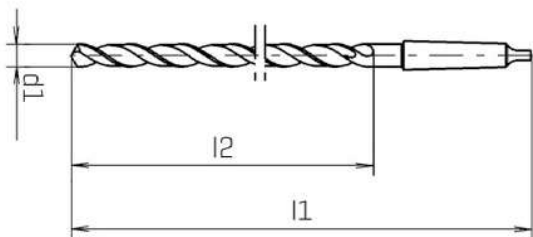

STEAMED					
d1 _{h8} mm	l1 mm	l2 mm		Code 282 Art.-Nr.	
9,00	345	220	1	0028200900100	1
10,00	360	235	1	0028201000100	1
10,50	360	235	1	0028201050100	1
11,00	375	250	1	0028201100100	1
11,50	375	250	1	0028201150100	1
12,00	395	260	1	0028201200100	1
12,50	395	260	1	0028201250100	1
13,00	395	260	1	0028201300100	1
13,50	410	275	1	0028201350100	1
14,00	410	275	1	0028201400100	1
14,50	425	275	2	0028201450100	1
15,00	425	275	2	0028201500100	1
15,50	445	295	2	0028201550100	1
16,00	445	295	2	0028201600100	1

STEAMED					
d1 _{h8} mm	l1 mm	l2 mm		Code 282 Art.-Nr.	
16,50	445	295	2	0028201650100	1
17,00	445	295	2	0028201700100	1
17,50	465	310	2	0028201750100	1
18,00	465	310	2	0028201800100	1
19,00	465	310	2	0028201900100	1
20,00	490	325	2	0028202000100	1
21,00	490	325	2	0028202100100	1
22,00	515	345	2	0028202200100	1
23,00	515	345	2	0028202300100	1
24,00	535	365	3	0028202400100	1
25,00	555	365	3	0028202500100	1
26,00	555	365	3	0028202600100	1
28,00	580	385	3	0028202800100	1
30,00	580	385	3	0028203000100	1

Kreuzanschliff / Split Point / Affilatura diamante AC ≤ Ø 16,0 mm
 Anschliff / Point Shape / Affilatura forma A > Ø 16,0 mm

