




A62
NEUTRE


A62
TiH1

Voorraad artikel

DIN 371
≤ M10

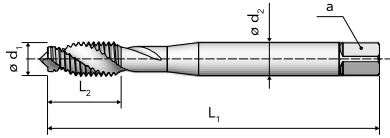

DIN 376
≥ M11

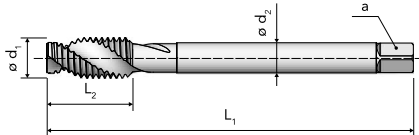

UTILISATION - VITESSE DE COUPE m/min

ISO	MG	A62 NEUTRE	A62 TiH1
N	N.1-2	● 12-15	● 25-30
	N.5-6	● 10-12	● 20-25
S	S.1	● 6-8	● 10-12
	S.3	● 6-8	● 10-12



Ød ₁	P	L ₁ js 16	L ₂	L ₃	Ød ₂ h9	a h12	Z		A62 NEUTRE	A62 TiH1
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[mm]	[-]	[mm]		
M 2	0,4	45	7	11	2,8	2,1	2	1,6	●	●
2,2	0,45	45	8	13	2,8	2,1	2	1,75	●	●
2,3	0,4	45	8	13	2,8	2,1	2	1,9	●	●
2,5	0,45	50	9	15	2,8	2,1	2	2,05	●	●
2,6	0,45	50	9	15	2,8	2,1	2	2,1	●	●
3	0,5	56	10	18	3,5	2,7	2	2,5	●	●
3,5	0,6	56	11	20	4	3	2	2,9	●	●
4	0,7	63	12	21	4,5	3,4	2	3,3	●	●
5	0,8	70	14	24,5	6	4,9	2	4,2	●	●
6	1	80	16	29	6	4,9	2	5	●	●
7	1	80	16	29	7	5,5	2	6	●	●
8	1,25	90	18	33	8	6,2	2	6,8	●	●
9	1,25	90	18	33	9	7	2	7,8	●	●
10	1,5	100	20	36	10	8	2	8,5	●	●
11	1,5	100	20	-	8	6,2	2	9,5	●	●
12	1,75	110	24	-	9	7	2	10,2	●	●
14	2	110	25	-	11	9	2	12	●	●
16	2	110	28	-	12	9	3	14	●	●