
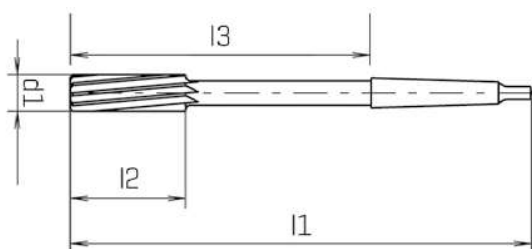


**D** Maschinenreibahlen mit Morsekegel, DIN 208 B, mit 8° Linksspirale

**E** Machine reamers with morse taper shank, DIN 208 B, 8° left hand spiral

**I** Machine reamers with morse taper shank, DIN 208 B, elica sinistra ca. 8°

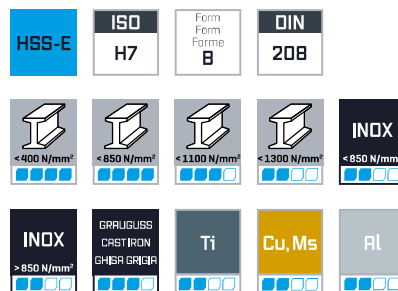

d1 <sub>H7</sub> mm	l1 mm	l2 mm	l3 mm		Z		Code 3130 Art.-Nr.
10,00	168	38	102,5	1	6	Ø9,8	0313001000100
11,00	175	41	109,5	1	6	Ø10,8	0313001100100
12,00	182	44	116,5	1	6	Ø11,8	0313001200100
13,00	182	44	116,5	1	6	Ø12,8	0313001300100
14,00	189	47	123,5	1	8	Ø13,8	0313001400100
15,00	204	50	124,5	2	8	Ø14,8	0313001500100
16,00	210	52	130	2	8	Ø15,8	0313001600100
17,00	214	54	134	2	8	Ø16,8	0313001700100
18,00	219	56	139	2	8	Ø17,8	0313001800100
19,00	223	58	143	2	8	Ø18,8	0313001900100
20,00	228	60	148	2	8	Ø19,8	0313002000100
21,00	232	62	152	2	8	Ø20,6	0313002100100
22,00	237	64	157	2	8	Ø21,6	0313002200100
23,00	241	66	161	2	8	Ø22,6	0313002300100
24,00	268	68	169	3	8	Ø23,6	0313002400100
25,00	268	68	169	3	8	Ø24,6	0313002500100
26,00	273	70	174	3	8	Ø25,6	0313002600100
27,00	277	71	178	3	8	Ø26,6	0313002700100
28,00	277	71	178	3	8	Ø27,6	0313002800100
30,00	281	73	182	3	10	Ø29,6	0313003000100



HSS-Senker und HSS-Reibahlen  
 HSS countersinks and HSS reamers  
 HSS svasatori e HSS alesatori