

# CoroTurn® 107-kop voor draaibewerking



Schroefbevestiging

CoroTurn® HP - Precisie koelmiddeltoevoer

KAPR

SL-SVPBR/L..LHP  
117.5°

SL-SVLBR/L..HP  
95.0°

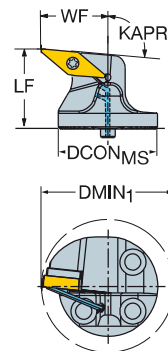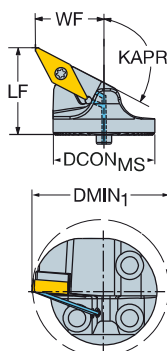

- VBMT, VBG T  
VCGX, VCEX,  
VCGT, VCET
- VB MW, VCMW

	CZC <sub>MS</sub>	DMIN <sub>1</sub>	RMPX	CNSC	Bestelnummer	Afmetingen, mm						MIID	
						DCON <sub>MS</sub>	LF	WF	BAR	NM	KG		
	16	32	40.0	45°	1	SL-SVLBR/L-32-16HP	32.0	32.0	22.0	80	3.0	0.13	VBMT 16 04 08
		40	50.0	45°	1	SL-SVLBR/L-40-16HP	40.0	32.0	27.0	80	3.0	0.19	VBMT 16 04 08
		25	35.0	45°	1	SL-SVLBR/L-25-16-LFHP	25.0	25.0	20.0	80	3.0	0.08	VBMT 16 04 08
	16	32	40.0	25°	1	SL-SVPBR/L-32-16-LHP	32.0	34.0	22.0	80	3.0	0.12	VBMT 16 04 08
		40	50.0	25°	1	SL-SVPBR/L-40-16-LHP	40.0	34.0	27.0	80	3.0	0.17	VBMT 16 04 08

R = Rechts, L = Links

Reserve onderdelen						
	CZC <sub>MS</sub>	Wisselplaat-schroef	Onderlegplaat	Onderlegplaat-schroef	Pasbus	Spuitmond
16	25	5513 020-10	5322 270-01	5512 090-01	5552 058-02	5691 026-13
16	32-40	5513 020-01			5638 031-01	5691 026-13

Ga voor de complete lijst van reserveonderdelen naar [www.sandvik.coromant.com](http://www.sandvik.coromant.com)

