


M - LINKS - HSSE - Machinetappen

Artikelnr.: HELLH

- Draairichting: links
- Spaangroeven: HELIX 35°
- Ingang: 2-3 spoed
- Boringen: blind 3xD
- Gebruik: standaard tot 900N/mm² - 27 HRC

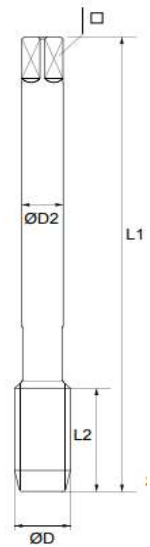

Prototap

Artikelnr: **HELLH**

M	D1	D2	L1	L2	□
DIN 371					
M 2 x 0,4	2,0	2,8	45	6	2,1
M 2,2 x 0,45	2,2	2,8	45	6	2,1
M 2,5 x 0,45	2,5	2,8	50	6	2,1
M 3 x 0,5	3,0	3,5	56	6	2,7
M 3,5 x 0,6	3,5	4,0	56	13	3,0
M 4 x 0,7	4,0	4,5	63	7	3,4
M 5 x 0,8	5,0	6,0	70	8	4,9
M 6 x 1,0	6,0	6,0	80	10	4,9
M 7 x 1,0	7,0	7,0	80	19	5,5
M 8 x 1,25	8,0	8,0	90	14	6,2
M 10 x 1,5	10,0	10,0	100	16	8,0
DIN 376					
M 3 x 0,5	3,0	2,2	56	6	-
M 4 x 0,7	4,0	2,8	63	7	2,1
M 5 x 0,8	5,0	3,5	70	8	2,7
M 6 x 1,0	6,0	4,5	80	10	3,4
M 8 x 1,25	8,0	6,0	90	14	4,9
M 10 x 1,5	10,0	7,0	100	16	5,5
M 12 x 1,75	12,0	9,0	110	18	7,0
M 14 x 2,0	14,0	11,0	110	20	9,0
M 16 x 2,0	16,0	12,0	110	22	9,0
M 18 x 2,5	18,0	14,0	125	25	11,0
M 20 x 2,5	20,0	16,0	140	25	12,0
M 22 x 2,5	22,0	18,0	140	27	14,5
M 24 x 3,0	24,0	18,0	160	30	14,5
M 27 x 3,0	27,0	20,0	160	30	16,0
M 30 x 3,5	30,0	22,0	180	35	18,0