



A

CoroCut® 1-2 houder voor groefsteken

Klemschroef ontwerp

Cilindrisch met platte vlakken - interne koelmiddeltoevoer

B

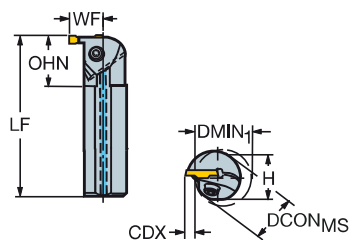

C

SSC	CZC _{MS}	CDX	DMIN ₁	OHX	OHN	CNSC	Bestelnummer	Afmetingen, mm						MIID	
								DCON _{MS}	H	LF	WF	BAR	NM		KG
E	32	9.5	40.0	128.0	45.0	1	R/LAG123E09-32B	32	30.0	250.0	25.5	10	4.0	1.44	N123E2-0200- GM
G	32	9.0	40.0	128.0	45.0	1	R/LAG123G09-32B	32	30.0	250.0	25.3	10	4.5	1.44	N123G2-0300- GM
							R/LAG123G11-40B	40	37.0	300.0	31.0	10	4.5	2.64	N123G2-0300- GM
H	32	10.0	40.0	128.0	45.0	1	R/LAG123H10-32B	32	30.0	250.0	26.5	10	4.5	1.43	N123H2-0400- GM
							R/LAG123H11-40B	40	37.0	300.0	31.0	10	5.0	2.65	N123H2-0400- GM
J	32	11.0	40.0	128.0	45.0	1	R/LAG123J11-32B	32	30.0	250.0	27.0	10	5.0	1.42	N123J2-0500- GM
							R/LAG123J11-40B	40	37.0	300.0	31.0	10	5.5	2.64	N123J2-0500- GM
K	40	11.0	50.0	160.0	55.0	1	R/LAG123K11-40B	40	37.0	300.0	31.0	10	5.5	2.37	N123K2-0600- GM
							R/LAG123K13-50B	50	47.0	350.0	38.3	10	5.5	4.96	N123K2-0600- GM

SSC = Moet overeenkomen met SSC op wisselplaat.

R = Rechts, L = Links

D

SSC	CZC _{MS}	Spanschroef	Reserve onderdelen
E	32	3212 012-259	
G	32	3212 012-309	
H	40	3212 012-310	
H	32	3212 012-359	
H	40-50	3212 012-360	
J	32	3212 012-359	
J	40-50	3212 012-360	
K	40-50	3212 012-360	

Ga voor de complete lijst van reserveonderdelen naar www.sandvik.coromant.com

F

G

H



B4



F2



G1



H36



H35



H5