
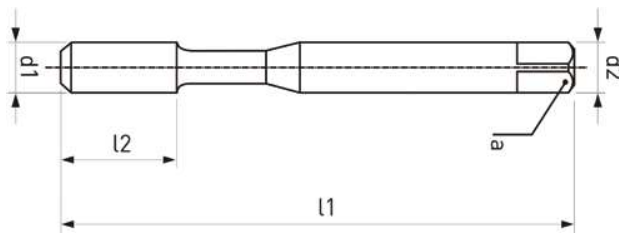


D Maschinengewinde bohrer gerade genutet, für Unified Grobgewinde UNC ANSI B 1.1

E Machine taps straight fluted, for unified coarse threads UNC ANSI B 1.1

I Maschi a macchina scanalature diritte, per filettatura americana UNC grossa ANSI B 1.1



d1 mm	P Gg/1"	l1 mm	l2 mm	d2 mm	a _{h12} mm		Code 5205 Art.-Nr.	Code 5215 Art.-Nr.
5	40	56	11	3,5	2,7	Ø 2,6	0520500500100	
6	40	56	12	4	3	Ø 2,6	0520500600100	
8	32	63	13	4,5	3,4	Ø 3,5	0520500800100	
10	24	70	16	6	4,9	Ø 3,9	0520501000100	
12	24	80	17	6	4,9	Ø 4,5	0520501200100	
1/4"	20	80	19	7	5,2	Ø 5,2	0520502000100	
5/16"	18	90	22	8	6,2	Ø 6,6	0520502200100	
3/8"	16	90	22	9	7	Ø 8	0520502400100	
7/16"	14	100	24	8	6,2	Ø 9,4		0521502600100
1/2"	13	110	28	9	7	Ø 10,75		0521502800100
9/16"	12	110	30	11	9	Ø 12,25		0521503000100
5/8"	11	110	32	12	9	Ø 13,5		0521503200100
3/4"	10	125	34	14	11	Ø 16,5		0521503400100
7/8"	9	140	34	18	14,5	Ø 19,5		0521503800100
1"	8	160	38	18	14,5	Ø 22,25		0521504200100
1 1/8"	7	180	45	22	18	Ø 25		0521504600100

DIN 371 ≤ 5-40 – 3/8"-16
DIN 376 ≥ 7/16-14" – 1 1/8"-7