


## UNEF - HSSG - Korte tap


Artikelnr.: 5306

- Draairichting: rechts
- Spaangroeven: recht (zonder schilaansnijding)
- Ingang: 2-3 spoed
- Type: Form C
- Boringen: doorlopend & blind
- Gebruik: standaard tot 900N/mm<sup>2</sup> - 27 HRC

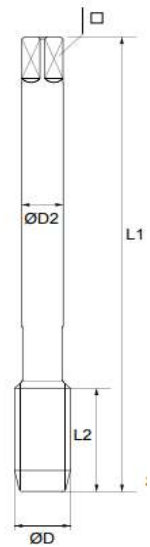

### Prototap


Artikelnr: **5306**

<b>UNEF</b>	D1	D2	L1	L2	□	
<b>UNEF No 12 x 32</b>	5,49	5,6	62	17	4,5	4,75
<b>UNEF 1/4 x 32</b>	6,35	6,3	66	19	5,0	5,60
<b>UNEF 5/16 x 32</b>	7,94	8,0	72	22	6,3	7,20
<b>UNEF 3/8 x 32</b>	9,53	10,0	80	24	8,0	8,80
<b>UNEF 7/16 x 28</b>	11,11	8,0	85	25	6,3	10,25
<b>UNEF 1/2 x 28</b>	12,70	9,0	89	29	7,1	11,80
<b>UNEF 9/16 x 24</b>	14,29	11,2	95	30	9,0	13,30
<b>UNEF 5/8 x 24</b>	15,88	12,5	102	32	10,0	14,90
<b>UNEF 11/16 x 24</b>	17,46	14,0	112	37	11,2	16,50
<b>UNEF 3/4 x 20</b>	19,05	14,0	112	37	11,2	17,75
<b>UNEF 13/16 x 20</b>	20,64	16,0	118	38	12,5	19,50
<b>UNEF 7/8 x 20</b>	22,23	16,0	118	38	12,5	21,00
<b>UNEF 15/16 x 20</b>	23,81	18,0	130	45	14,0	22,50
<b>UNEF 1" x 20</b>	25,40	16,0	130	45	14,0	24,25

## UNEF - HSSG - Korte tap

Artikelnr.: 5306

- Draairichting: rechts
- Spaangroeven: recht (zonder schilaansnijding)
- Ingang: 2-3 spoed
- Type: Form C
- Boringen: doorlopend & blind
- Gebruik: standaard tot 900N/mm<sup>2</sup> - 27 HRC



### Prototap

Artikelnr: **5306**

<b>UNEF</b>	D1	D2	L1	L2	□	
<b>UNEF 1.1/16 x 18</b>	26,99	20,0	138	48	16,0	25,70
<b>UNEF 1.1/8 x 18</b>	28,58	20,0	138	48	16,0	27,25
<b>UNEF 1.3/16 x 18</b>	30,16	22,4	151	51	18,0	28,75
<b>UNEF 1.1/4 x 18</b>	31,75	22,4	151	51	18,0	30,50
<b>UNEF 1.5/16 x 18</b>	33,34	25,0	162	57	20,0	32,00
<b>UNEF 1.3/8 x 18</b>	34,93	25,0	162	57	20,0	33,50
<b>UNEF 1.7/16 x 18</b>	36,51	28,0	170	60	22,4	35,20
<b>UNEF 1.1/2 x 18</b>	38,10	28,0	170	60	22,4	36,80
<b>UNEF 1.9/16 x 18</b>	39,69	28,0	170	60	22,4	38,40
<b>UNEF 1.5/8 x 18</b>	41,28	28,0	170	60	22,4	40,00
<b>UNEF 1.11/16 x 18</b>	42,86	31,5	187	67	25,0	41,50
<b>UNEF 1.3/4 x 18</b>	44,45	31,5	187	67	25,0	43,00
<b>UNEF 2" x 18</b>	50,80	35,5	200	70	28,0	49,50